
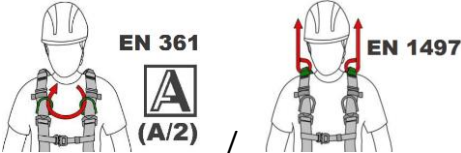




V35 MULTIACCESS



Certification	EN 361 (Full body harness) EN 1497 (Rescue harness) CE 2756
Webbing	Webbing: Vertiqual standard 33 ; • Width: 45 mm • Breaking load > 3300 daN
Buckles	Quick Lock Material: aluminium alloy; Locking mechanism: Automatic 
Rings	SPACE AERO 7 (aluminium, 22kN, hip area), Forged 30 (steel, 30 kN, chest area), Forged 40 (steel, 40kN, dorsal ring);
Attachment points	<p>-STERNAL RINGS (for fall arrest EN 361 or rescue EN 1497)</p>  <p>-DORSAL RING (for fall arrest EN 361);</p>  <p>-RESCUE LOOPS (shoulder area, for rescue acc. to EN 1497)</p> 
Sizes	S-M , M-L , L-XL , XXL-XXXL
Max. 150 kg	Max user weight: 150kg (user+equipment) In this case, a suitable energy absorbing lanyard must be used, so that the maximum force of the shock after a fall is reduced to less than 6kN. Read the instructions carefully!
Up to 10 years	Safety harnesses belonging to a single user, which were subject to periodical inspections by experts and recorded in the Inspection Log, carefully treated and maintained, were stored in accordance with regulations, were not in contact with oils, greases or aggressive chemicals, were not used extensively, can be hold in service for up to 10 years. Please follow using instruction manual!