



Anchor slings

Certifications	EN 354-Connecting lanyards EN 566-Mountaineering equipment EN 795-Anchor devices (slings) CE 2756
Webbing	Type: flat webbing; Width: 16 mm; Material: Dyneema® + PA ;
Breaking strength	Minimum 25 kN
Length	60 – 200 cm <i>*other lengths on request</i>

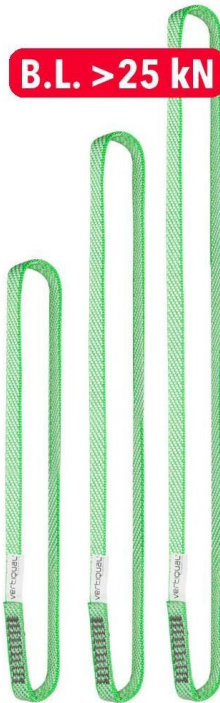

VANGUARD

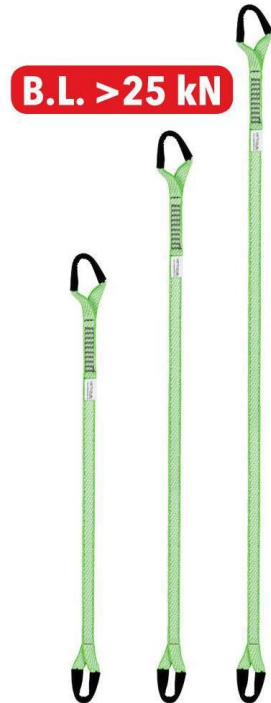

VANGUARD S



VANGUARD	Green-White Art. No.	Red-White Art. No.	Black-White Art. No.
60 cm	12-4025-50-06-00	12-4025-40-06-00	12-4025-90-06-00
80 cm	12-4025-50-08-00	12-4025-40-08-00	12-4025-90-08-00
100 cm	12-4025-50-10-00	12-4025-40-10-00	12-4025-90-10-00
120 cm	12-4025-50-12-00	12-4025-40-12-00	12-4025-90-12-00
160 cm	12-4025-50-16-00	12-4025-40-16-00	12-4025-90-16-00
200 cm	12-4025-50-20-00	12-4025-40-20-00	12-4025-90-20-00



VANGUARD S	Green-White Art. No.	Red-White Art. No.	Black-White Art. No.
60 cm	12-4225-50-06-00	12-4225-40-06-00	12-4225-90-06-00
80 cm	12-4225-50-08-00	12-4225-40-08-00	12-4225-90-08-00
100 cm	12-4225-50-10-00	12-4225-40-10-00	12-4225-90-10-00
120 cm	12-4225-50-12-00	12-4225-40-12-00	12-4225-90-12-00
160 cm	12-4225-50-16-00	12-4225-40-16-00	12-4225-90-16-00
200 cm	12-4225-50-20-00	12-4225-40-20-00	12-4225-90-20-00